


ISO  
9001:2008  
13485:2012

CE  
0434

# HIGH PERFORMANCE SUCTION UNITS



**Kay & Company**

Distinct Products.Outstanding Service

**Hurricane**



**Europa**



[www.kaycoindia.com](http://www.kaycoindia.com)



## K-Maxima

<b>Flow Rate:</b>	30~35 L/Min
<b>Max. Vacuum:</b>	-710 mmHg $\pm$ 10mmHg
<b>Noise Level:</b>	50dBa $\pm$ 3dBa
<b>Jar Capacity:</b>	2 x 2000ml PC Jars
<b>Class:</b>	Class IIa Type I
<b>Vacuum Pump Type:</b>	Rocker Piston
<b>Motor Type:</b>	0.25 HP 0.80A 90W
<b>Electrical Requirements:</b>	220V AC I Ph 50 Hz
<b>Suggested Application:</b>	Hospital / Nursing Home
<b>Warranty:</b>	12 Months



## Hurricane Surgical Suction Unit

- Body made of strong FRP Cabinet
- Noise level of suction apparatus from is 50 dB +/- 03 dB
- Ideal for MTP / medical / surgical procedures
- Piston Pump with -710  $\pm$  10 mm Hg
- Electrical Requirement - 220~230V, 50Hz, 1Phase
- Free air displacement 30 ~ 35 LPM
- Heavy duty HN-50 PU Castors
- 50 mm Vacuum Gauge
- Non collapsible suction tubing
- 2 X 2.0 Ltrs. Polycarbonate jars with overflow safety
- Bacterial filter fitted



## Europa AC/DC Suction Unit

<b>Battery Back up:</b>	60 Minutes on full charge
<b>Flow Rate:</b>	12~15 L/Min
<b>Max. Vacuum:</b>	-550 mmHg $\pm$ 10mmHg
<b>Noise Level:</b>	50dBa $\pm$ 3dBa
<b>Jar Capacity:</b>	600ml PC Jar
<b>Class:</b>	Class IIa
<b>Vacuum Pump Type:</b>	Rocker Piston
<b>Motor Type:</b>	2800rpm 12VDC
<b>Electrical Requirements:</b>	220V AC or 12VDC
<b>Suggested Application:</b>	Ambulance
<b>Warranty:</b>	12 Months



ISO  
9001:2008  
13485:2012

CE  
0434



## K-MinVac

<b>Flow Rate:</b>	12~15 L/Min
<b>Max. Vacuum:</b>	-550 mmHg $\pm$ 10mmHg
<b>Noise Level:</b>	50dBa $\pm$ 3dBa
<b>Jar Capacity:</b>	1500ml PC Jar
<b>Class:</b>	Class IIa
<b>Vacuum Pump Type:</b>	Rocker Piston
<b>Motor Type:</b>	2800rpm 100W
<b>Electrical Requirements:</b>	220V AC 1 Ph 50Hz
<b>Suggested Application:</b>	Hospital / Nursing Home
<b>Warranty:</b>	12 Months



## KayEdge (High Flow Suction Unit)

- Powder Coated Mild Steel Heavy Cabinet.
- Noise level of suction machine is 50 dBA + 03 dBA.
- 2 x 2.0 Ltrs. Polycarbonate jars with overflow safety.
- Rocker piston pump with -730 + 10 mmHg.
- Electrical requirement – 220~230V, 50 Hz, Single phase.
- Free air displacement 60~65 Ltrs./Min.
- Non collapsible suction tubing.
- Heavy duty HN50 castors.
- 50mm vacuum gauge.
- Ideal for MTP / Medical / Surgical procedures.



## Foot/Pedal Suction Units (Single Bottle)

- Base - Powder coated heavy MS base.
- Capacity - -600mmHg +/- 10 at 200ml per Stroke
- Pump type - Heavy piston pump.
- Jar - Polycarbonate 1500ml capacity with over flow system & ABS Lid.
- Filter - Bacterial filter autoclavable / reusable.
- Tubing - Non-collapsible suction tubing.
- Vacuum Gauge - 2.0 inch, 0-760 mmHg
- Operated - Manual



**ISO**  
9001:2008  
13485:2012

**CE**  
0434



## Foot/Pedal Suction Unit (Double Bottle)


- Base - Powder coated heavy MS base.
- Capacity - -600mmHg +/- 10 at 200ml per Stroke
- Pump type - Heavy piston pump.
- Jar - 2 x Glass Jar 1500 ml
- Handle to carry.
- Tubing - Non-collapsible suction tubing.
- Vacuum Gauge - 2.0 inch, 0-760 mmHg
- Operated - Manual



## Silicon Suction Cup

- 100% Silicon medical product
- This vacuum suction cup could assist and shorten second stage of labor in occipital.
- Minimize the risk of Traumas, Cephalohematoma and Forceps delivery
- The soft cup can protect and decrease possible danger of damaging the fetus head.
- Black guideline is designed for positioning reference.
- The handle and valve assemblies are manufactured of chrome plated brass and can be replaced.
- Available Size : 40, 50, 60mm

## Vacuum Extractor Set

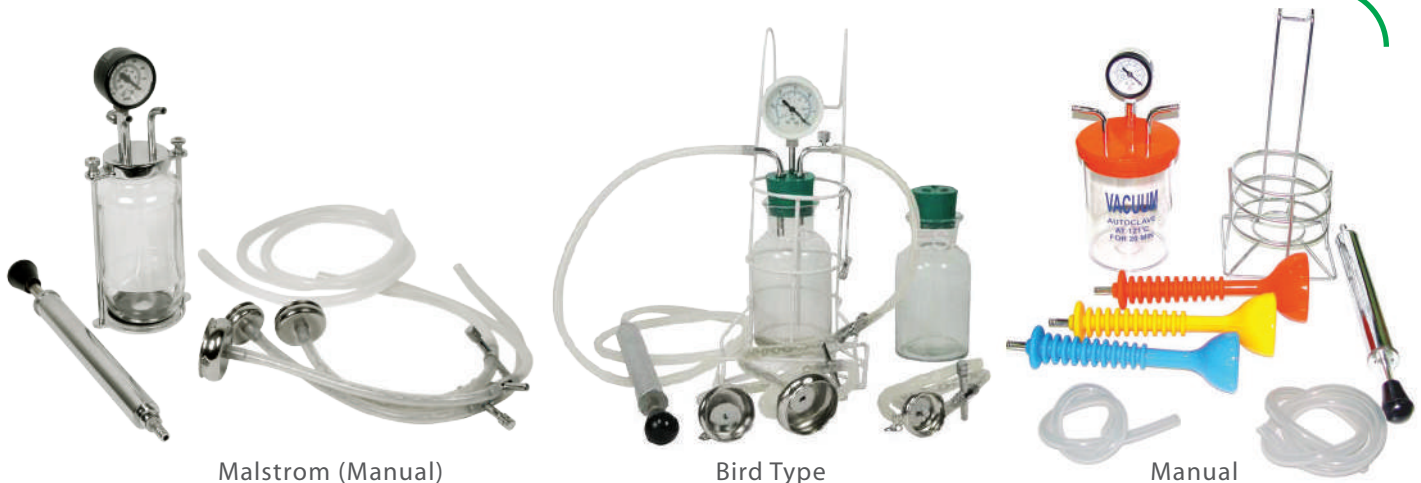

Malstrom (Manual)

Bird Type

Manual

# Kay & Company

B-316, Okhla Industrial Area, Phase-1, New Delhi-110020. INDIA

Ph. : +91 11 43195600 - 20 Lines

Email : info@kay-co.com, sales@kaycoindia.com

[www.kaycoindia.com](http://www.kaycoindia.com)